

DESCRIPTION

The PU651 series of AC-DC switching power supplies in a package of 4 x 8 x 2.58 inches are capable of delivering 600-650 watts of continuous power at 30 CFM forced air cooling. The units are constructed on a printed circuit board with a U-bracket for mechanical support and heat sinking. A cover and fan assembly can be added during manufacturing. They are designed for ITE, telecommunication, audio/video and industrial applications.

FEATURES

- Operation up to 5000 meters
- 90-264 VAC input with active PFC
- EN61000-3-2 class A and D compliant
- Overvoltage protection
- Thermal protection
- Standby output 5VDC at 200mA
- EN55032 Class B conducted emissions
- Inhibit - TTL high to disable output
- Compliant with RoHS requirements

INPUT SPECIFICATIONS

Input voltage:	90-264 VAC
Input frequency:	47-63 Hz
Input current:	8.4 A (rms) @ 115 VAC, 60 Hz 4.2 A (rms) @ 230 VAC, 50 Hz
Earth leakage current:	300 µA max. @ 264 VAC, 63 Hz

OUTPUT SPECIFICATIONS

Output voltage/current:	See rating chart.
Maximum output power:	See rating chart.
Ripple and noise:	1% peak to peak maximum
Remote sense:	Compensation for cable losses up to 0.5V
Overvoltage protection:	Set at 115-140% of nominal output voltage
Overcurrent protection:	Protected to output short circuit conditions
Thermal shutdown:	Protected to over temperature conditions
Temperature coefficient:	All outputs $\pm 0.04\%$ / $^{\circ}\text{C}$ maximum
Transient response:	Maximum excursion of 4%, recovering to 1% of final value within 500 µs after a 25% step load change
Standby power:	5 V at 200 mA maximum
Fan power:	12 V at 500 mA maximum

ENVIRONMENTAL SPECIFICATIONS

Operating temperature:	-10 $^{\circ}\text{C}$ to +70 $^{\circ}\text{C}$
Storage temperature:	-40 $^{\circ}\text{C}$ to +85 $^{\circ}\text{C}$
Relative humidity:	5% to 95% non-condensing
Temperature derating:	Derate from 100% at +50 $^{\circ}\text{C}$ linearly to 50% at +70 $^{\circ}\text{C}$, applicable to convection and forced-air cooling conditions

PU651 SERIES



CE (LVD)
RoHS

SAFETY STANDARD APPROVALS



UL 62368-1, CSA C22.2 No. 62368-1

TÜV EN 62368-1

GENERAL SPECIFICATIONS

Switching frequency:	55-300 KHz
Efficiency:	Typical 88%
Hold-up time:	12 ms minimum at 110 VAC & 650 W
Line regulation:	$\pm 0.5\%$ maximum at full load
Inrush current:	20 A @ 115 VAC, or 40 A @ 230 VAC, at 25 $^{\circ}\text{C}$ cold start
Withstand voltage:	4242 VDC from input to output, 2500 VDC from input to ground, 707 VDC from output to ground
MTBF:	190,000 hours at full load at 25 $^{\circ}\text{C}$ ambient, calculated per MIL-HDBK-217F

EMC Performance


EN55032	Class B conducted, class B radiated
FCC:	Class B conducted, class B radiated
VCCI:	Class B conducted, class B radiated
EN61000-3-2:	Harmonic distortion, class A and D
EN61000-3-3:	Line flicker
EN55024	
EN61000-4-2:	ESD, ± 8 KV air and ± 4 KV contact
EN61000-4-3:	Radiated immunity, 3 V/m
EN61000-4-4:	Fast transient/burst, ± 1 KV
EN61000-4-5:	Surge, ± 1 KV diff., ± 2 KV com
EN61000-4-6:	Conducted immunity, 3 Vrms
EN61000-4-8:	Magnetic field immunity, 1 A/m
EN61000-4-11:	Voltage dip immunity, 30% reduction for 500 ms and >95% reduction for 10 ms

INTERFACE SIGNALS

PFD: TTL high for normal operation, low upon loss of input power, turn-on delay time 100-750 ms, turn-off delay time 1 ms minimum

Inhibit: TTL high to turn off output

OUTPUT POWER DERATING CURVE

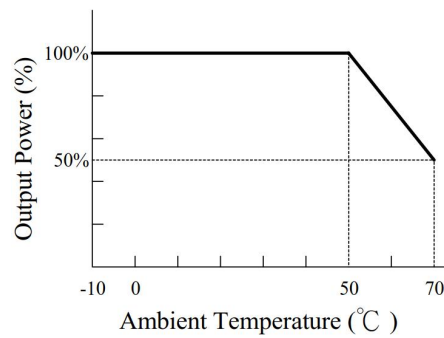

OUTPUT VOLTAGE/CURRENT RATING CHART


Model ⁽¹⁾	Output							Efficiency (typical) @600-650W 115/230 Vac
	V1	Min. Current ⁽²⁾	Max. Current at 30 CFM ⁽³⁾	Peak current ⁽⁵⁾	Tol.	Ripple & Noise ⁽⁴⁾	Max. Output Power ⁽³⁾	
PU651-12B	12 V	0.1 A	50.00 A	55.0 A	±2%	120 mV	600 W	88 /90%
PU651-13B	15 V	0.1 A	40.00 A	44.0 A	±2%	150 mV	600 W	88 /90%
PU651-13-1B	18 V	0.1 A	36.12 A	40.0 A	±2%	180 mV	650 W	88 /90%
PU651-14B	24 V	0.1 A	27.09 A	30.0 A	±2%	240 mV	650 W	88 /90%
PU651-15B	28 V	0.1 A	23.22 A	25.5 A	±2%	280 mV	650 W	89 /91%
PU651-16B	30 V	0.1 A	21.67 A	23.8 A	±2%	300 mV	650 W	89 /91%
PU651-16-1B	32 V	0.1 A	20.32 A	22.4 A	±2%	320 mV	650 W	89 /91%
PU651-17-1B	34 V	0.1 A	19.12 A	21.0 A	±2%	340 mV	650 W	89 /91%
PU651-17B	36 V	0.1 A	18.06 A	20.0 A	±2%	360 mV	650 W	89 /91%
PU651-18B	48 V	0.1 A	13.55 A	15.0 A	±2%	480 mV	650 W	89 /91%
PU651-19B	57 V	0.1 A	11.41 A	12.5 A	±2%	570 mV	650 W	89 /91%
PU651-19-1B	58 V	0.1 A	11.21 A	12.3 A	±2%	580 mV	650 W	89 /91%

NOTES:


1. Change suffix "B" for U-Bracket form to "C" for enclosed form with cover and fan assembly, e.g. PU651-14C.
2. All models may be operated at no-load without damage. At no load, output voltage fluctuates beyond 5% due to the burst-mode operation of the control IC in them for energy saving.
3. 600-650 W for "C" version, or with 30 CFM forced air provided by user for "B" version
4. Ripple and noise is maximum peak-to-peak voltage value measured at output within 20 MHz bandwidth, at rated line voltage and output load ranges, and with a 10 µF tantalum capacitor in parallel with a 0.1 µF ceramic capacitor across the output.
5. Peak output current with 10% duty cycle maximum for less than 15 seconds, average power not to exceed maximum power rating.

MECHANICAL SPECIFICATIONS

U-bracket Form

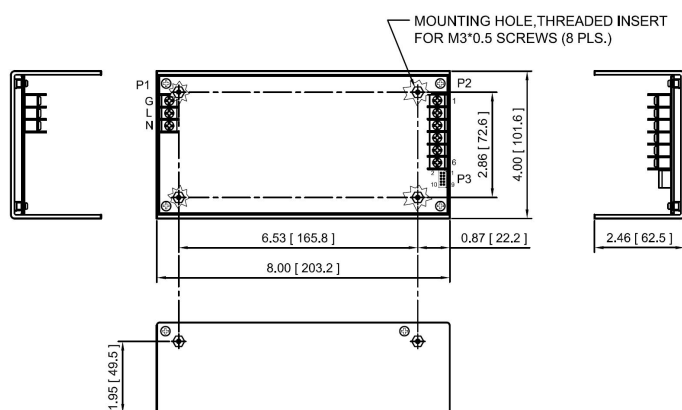

Enclosed Form

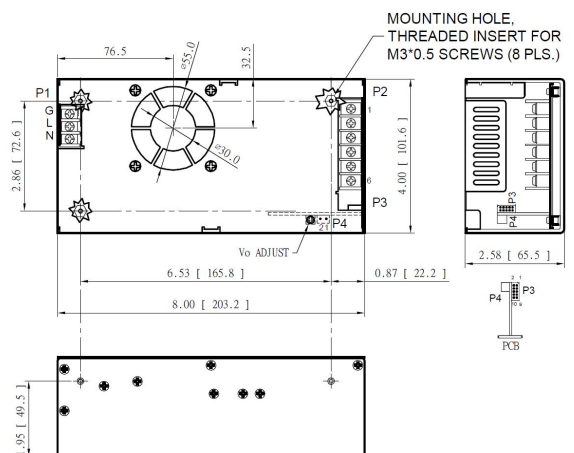

NOTES:

1. Dimensions shown in inches [mm], tolerance 0.02 [0.5] maximum.
2. Input connector P1 is Dinkle terminal P/N DT-35-B01W-03, with nickel plated M3 screws.
3. Output connector P2 is Dinkle terminal P/N DT-4N-B01W-06, with nickel plated M3.5 screws.
4. Output connector P3 is JST header S10B-PHDSS or equivalent, mating with JST housing PHDR-10VS or equivalent.
5. Fan connector P4 is JST header S2B-ZR-3.4 or equivalent, mating with JST housing ZHR-2 or equivalent.
6. Weight: 1.8 Kgs (3.97 lbs.) approx. for U-bracket form, 2.0 Kgs. (4.41 lbs.) approx. for enclosed form.
7. Maximum penetration of fixing screws is 4 mm from the outer surface of chassis.

PIN CHART

Connector	P1 (AC)			P2						P4	
PIN NO	1	2	3	1	2	3	4	5	6	1	2
Polarity	Ground	Live	Neutral	+V1			Common Return			+12V Fan	Common Return

Connector	P3									
PIN NO	1	2	3	4	5	6	7	8	9	10
Polarity	+V1 Sense	-V1 Sense	PFD	Common Return	N.A.	N.A.	Inhibit	N.A.	+5V Standby	+5V Standby Return